




# HUB-GM200

## Technical data sheet


Document version 1.1 | Released on:  
25. April 2025

# Views of the HUB-GM200

## Device views

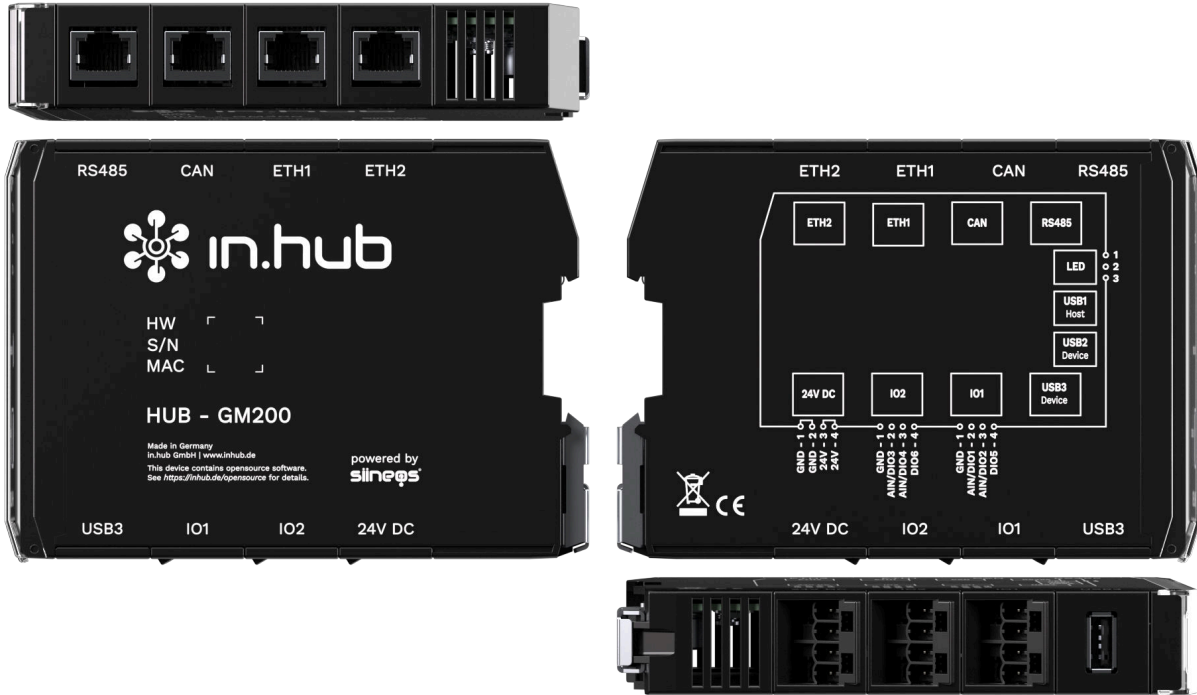

## Schematic diagram

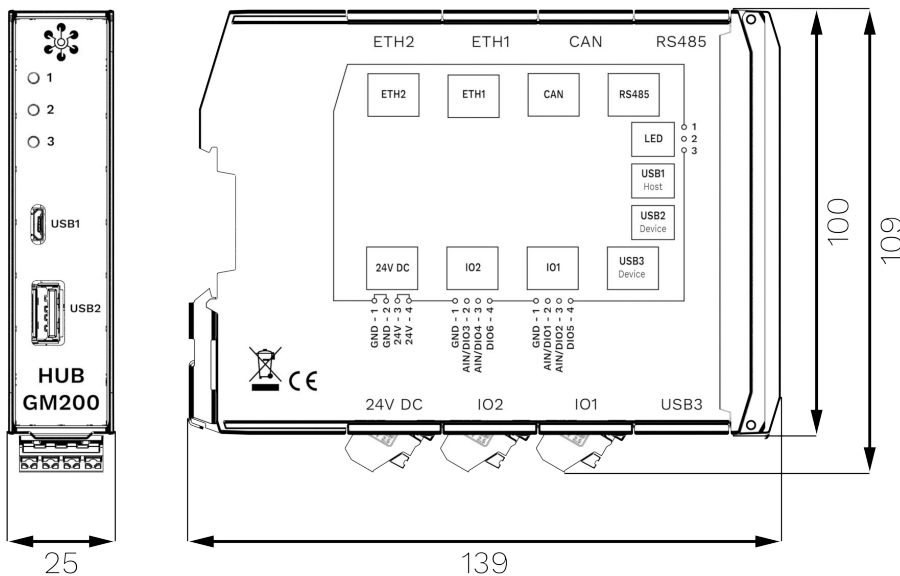

Dimensions of the HUB-GM200 in mm

## Technical data

Data	
Power supply	24 V DC $\pm$ 10 %
Max. power consumption	120 W
Processor	Colibri IMX7D 1 GB 32 bit, 2 $\times$ ARM Cortex-A7 CPU ARM®, 1 $\times$ Cortex-M4 CPU Core®
Memory	1 GB DDR3L RAM, 4 GB eMMC
Data interfaces	USB1: Host (Micro USB) USB2: Device (USB-A) USB3: Device (USB-A) 2 $\times$ Ethernet: 100 Mbit/s 1 $\times$ CAN 1 $\times$ RS485 3 $\times$ status LEDs Backplane bus
Connections for peripheral devices	A total of 6 interfaces in IO1 and IO2, configurable in SII-NEOS: up to 6 $\times$ as a digital input up to 6 $\times$ as a digital output up to 4 $\times$ as analogue input
Protocols	OPC UA server + client MQTT broker server + client Modbus TCP/IP broker client + server
Operating system	SIINEOS IIoT operating system for configuration and data visualization
Housing	Plastic (polyamide), black, flammability class UL 94 V0
Protection class	IP20
Dimensions	139 mm $\times$ 100 mm $\times$ 25 mm
Weight	181 g


Ambient conditions	
Temperature range	Storage: $-40^{\circ}\text{C}$ to $85^{\circ}\text{C}$ Operation: $0^{\circ}\text{C}$ to $50^{\circ}\text{C}$
Humidity	Storage: 10% to 95% RH, non-condensing Operation: 20% to 90% RH, non-condensing
Operating altitude	Max. 2,000 m above sea level


Storage	
Recording interval	Minimum 1 second
Storage	Up to 4 GB usable

<b>Storage</b>	
Data export	VictoriaMetrics

<b>SIINEOS</b>	
Pre-installed software	<p><b>FlexPlorer:</b> Live data visualization</p> <p><b>Azure IoT Hub Connector:</b> Connector to the Microsoft® IoT platform</p> <p><b>Cloud of Things Connector:</b> Connector to the Telekom® IoT platform</p> <p><b>InGraf:</b> Grafana data visualization</p> <p><b>NumCorder:</b> Recording of scanned or entered barcodes / serial numbers</p> <p><b>OPC UA server:</b> Counterpart to the OPC UA client, setting up of a server–client structure with one device</p> <p><b>NodeRED:</b> Graphical programming of interfaces, services or hardware</p> <p><b>PromEx:</b> Database configuration of VictoriaMetrics and Prometheus</p> <p><b>TOSIBOX®:</b> Secure connectivity between the IoT devices</p> <p><b>SIGNL4:</b> Forwarding of alarms to the SIGNL4 cloud</p>
I/O interfaces to third-party systems/devices	<p><b>S7 PLC client:</b> Connector for the Siemens® S7 controller</p> <p><b>Sensirion SPS30:</b> Temperature and humidity sensor</p> <p><b>TBEN-S1-8DIP:</b> TBEN module from TURCK®</p> <p><b>TBEN-S2-4AI:</b> TBEN module from TURCK®</p>

## Specification of inputs and outputs

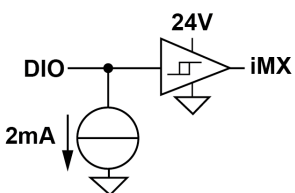Configuration of DIO as a digital input	
Conformity	EN61131-2 Type 1/3
Switching threshold	Between 5 V and 11 V
Pull-down current	Typ. 2 mA
Bandwidth	From 6 Hz (with 12 channels, 2 edges) to 150 Hz (with 1 channel, 1 edge)*
Permissible input voltage range	-3 to 30 V
Circuit diagram**	

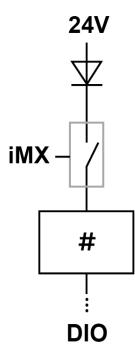Configuration of DIO as a digital output	
Power supply	From 24 V Protective functions: Overload protection, reverse-current protection
Conformity	EN61131-2 nominal current 0.1 A
Max. output current	Typ. 120 mA
Switching interval	≥50 ms*
Voltage drop to 24 V	Max. 1 V
Circuit diagram**	

Analogue input AIN	
Operating modes	Current Voltage
Measuring range	0–11 V / 0–24 mA
Resolution	12 bit
Input resistance	101 k $\Omega$ (at 0–11 V)
Sampling interval	$\geq 50$ ms*
Permissible input voltage range	–3 to 30 V
Protective functions	Overload protection: in 20 mA mode, the current is limited to 22–30 mA
Circuit diagram**	

\*Only if processor is not busy

\*\*The hash (#) in the circuit diagram indicates the overload protection.

## USB interface specifications

USB connections	
Max. power consumption for <b>USB1</b> (Micro-USB on the front of the device)	5 W (1 A) May vary depending on the device connected: <ul style="list-style-type: none"> <li>On a 24 V power supply, the power consumption is 0</li> <li>On a 5 V power supply provided exclusively by USB, the digital and analogue outputs cannot be used.</li> </ul>
Max. power output for <b>USB2</b> and <b>USB3</b>	2.5 W (500 mA) each with 24 V supply
Support for	Full, high and low speed (480, 12 and 1.5 Mbit/s)
Circuit diagram*	

\*The hash (#) in the circuit diagram indicates the overload protection.

## CAN interface specification

CAN bus	
Voltage output	24 V (0.75 A) Protective functions: Reverse-polarity protection, overload protection
Max. baud rate	1 Mbit/s
Bus termination	120 Ω

## RS485 interface specification

RS485 bus	
Voltage output	24 V (0.75 A) Protective functions: Reverse-polarity protection, over-load protection
Max. baud rate	2.5 Mbit/s
Bus termination	120 $\Omega$

## Backplane bus specification

Backplane bus	
Voltage on the backplane bus	Voltage of the power supply unit minus 0.5 V Switchable in the signals of the master gateway Protective functions: Overload protection
Communication	Modbus RTU
Max. number of additional modules on one master gateway	3



This document is available in electronic form in the download portal of in.hub. Printed versions or copies not explicitly provided by in.hub are deemed uncontrolled.

The original language of this document is German.

Made in Germany.

Service & Support: [service@inhub.de](mailto:service@inhub.de) | <https://community.inhub.de/>

in.hub Download portal: <https://download.inhub.de/>



**in.hub GmbH**  
**Technologie-Campus 1**  
**DE-09126 Chemnitz**

**+49 371 335 655 00**  
**[info@inhub.de](mailto:info@inhub.de)**